

100A

TANDEM AXLE OVER THE AXLE TRAILER


G.V.W.R. 9,990#	AXLES Two 5200# Cambered Axles w/ Elec. Brakes
G.A.W.R. (EA. AXLE) 5,080#	SUSPENSION Multi-Leaf Spring w/ Equalizer
COUPLER 2-5/16" Adjustable Bulldog	TIRE ST225/75-15 Load Range D
SAFETY CHAINS 1/4" Grd. 70 w/ Safety Latch Hook (2 ea.)	WHEEL 15 X 6 White Spoke 6 Bolt
JACK 7K Drop Leg Jack, Bolted On	FLOOR 2" Pine
TONGUE Integral With Frame	LIGHTS D.O.T. Stop, Tail, Turn and Clearance
TOP RAIL (none)	ELEC. PLUG 6 Way
FRAME 10" I-Beam	FINISH (PREP) Acid Etched w/White Phosphorus, Undercoated w/Panther 813 & Two Coats Primer
CROSSMEMBERS 3" x 3.5# channel	FINISH Painted w/ 2 Coats High Solid <i>Supreme</i> Acrylic Automotive Grade Enamel, and Pinstriped
SIDE RAILS 3" X 5" Angle w/ Stake Pockets & Rubrail on Both Sides, Front & Rear	

STANDARD FEATURES

- Two 5200# Cambered Axles w/ 2 Electric Brakes
- Jack Bolted On For Easy Replacement
- Floor Secured w/ 5/16" Torx Screws
- Complete Break-A-Way System w/ Charger
- Safety Chains Attached w/ Cold Rolled Eyelets
- Rub Rail w/ Stake Pockets
- Adjustable Coupler In Channel
- Rubber Mounted, Sealed Lighting
- Reflective Marker Tape

100A-16

LENGTH	DIMENSIONS		
	A	B	C
14'	169-1/2"	66-1/2"	103"
16'	193-1/2"	78-1/2"	115"
18'	217-1/2"	90-1/2"	127"
20'	240"	102"	138"

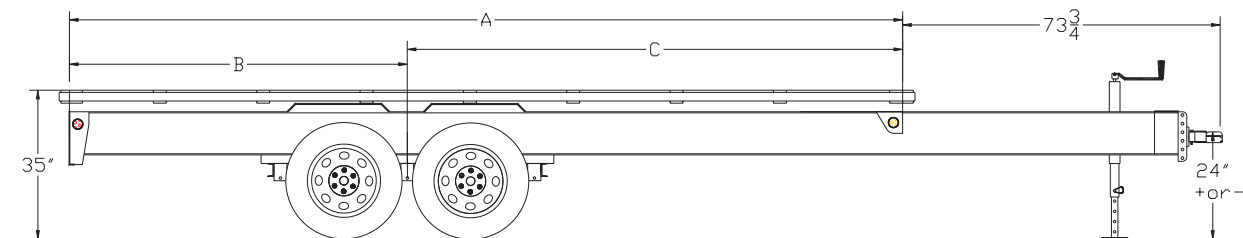

OPTIONS

NBK2	Electric Brakes On 1 Axle Only
HYD1	Hydraulic Brakes On 1 Axle w/ Adjustable Demco Actuator
HYD2	Hydraulic Brakes On 2 Axles w/ Adjustable Demco Actuator
SP	15" Spare Tire & Wheel - Load Range D
TU	Tire Upgrade to 16" - Load Range E
SPU	Spare Tire Upgrade to 16" - Load Range E
SF	1/8" Diamond Plate Steel Floor (Per Sq. Ft.)
HDLJ	10K Heavy Duty Drop Leg Jack - Top Wind
AP	Adjustable Pintle In Channel

Effective January 1, 2003 (Specifications and Options subject to change without notice.)