

25GN

TANDEM DUAL AXLE GOOSENECK


G.V.W.R.	25,900#	AXLES	Two HD 10,000# Dual Wheel Electric Brake Axles (Oil Bath)
G.A.W.R. (EA. AXLE)	10,000#	SUSPENSION	Hutch 9700 Adjustable
COUPLER	2-5/16" Ball, Square Crank Type	TIRE	LT235/85R16 Load Range E
SAFETY CHAINS	3/8" Grd. 70 w/Safety Latch Hook (2 ea.)	WHEEL	16 X 6 Dual 8 Bolt
JACKS	Two Speed Landing Gear Jack Set 150,000# Capacity (Bolted On)	FLOOR	2" Pine
NECK	12" Channel	LIGHTS	D.O.T. Stop, Tail, Turn and Clearance
FRAME	12" - 16# I-Beam	ELEC. PLUG	6 Way
CROSSMEMBERS	3" Channel	FINISH (PREP)	Acid Etched w/White Phosphorus, Undercoated w/Panther 813 & Two Coats Primer
SIDE RAILS	8" Channel w/Rub Rail and Stake Pockets on 24" Centers	FINISH	Painted w/ 2 Coats High Solid <i>Supreme</i> Acrylic Automotive Grade Enamel, and Pinstriped

STANDARD FEATURES

- Complete Break-A-Way System w/ Battery & Charger
- Rubber Mounted Sealed Lighting
- Spare Tire Mount
- (2) Side Bed Steps
- Safety Reflective Marker Tape
- 102" Overall Width
- Formed Crossmember to Frame Gussets
- Two Heavy Duty 10,000# Oil Bath Axles
- Chain Basket Between Gooseneck Uprights
- Low Profile Bed
- 30' Length or Longer Includes Anti-Twist Frame
- Modular Sealed Wiring Harness

LENGTH	DIMENSIONS- STRAIGHT DECK			DIMENSIONS- WITH DOVETAIL		
	A	B	C	D	B	E
20'	240"	160"	80"	300"	188"	112"
22'	264"	176"	88"	324"	216"	108"
24'	288"	192"	96"	348"	232"	116"
26'	312"	208"	104"	372"	248"	124"
28'	336"	224"	112"	396"	264"	132"
30'	360"	240"	120"	420"	280"	140"
32'	384"	256"	128"	444"	296"	148"
34'	408"	272"	136"	468"	312"	156"
36'	432"	288"	144"	492"	328"	164"
40'	480"	320"	160"	540"	360"	180"

25GN-20

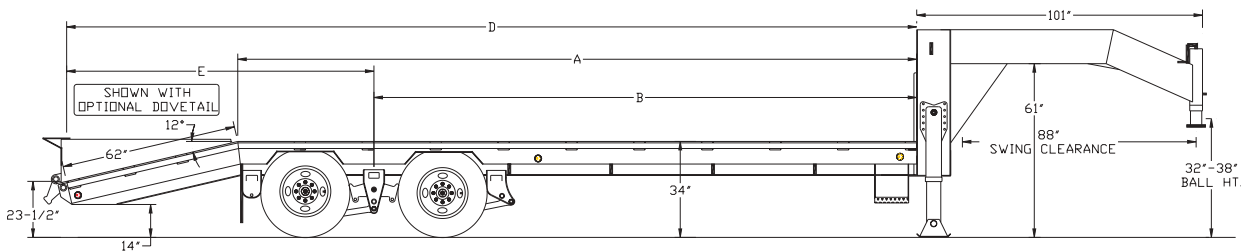

OPTIONS

DT	5' Dovetail with Double Hinged Ramps (Added to Existing Length)
AIRBRK	Air Brake Assembly w/ ABS One Axle
AIRBRK2	Air Brake Assembly w/ ABS Two Axles
VAC	Vacuum Over Hydraulic Drum Brakes
DON	Deck on the Neck (6')
SP	16" Spare Tire & Wheel Load Range E
LPTB	Low Profile Tool Box 12" X 18" X 36" (Side Mount)
CPDT	5' Center Popup Dovetail with Double Hinged Ramp

Effective January 1, 2003 (Specifications and Options subject to change without notice.)