

Motorcycle SE Series Standards

Solid engineering delivers solid performance. Even though a motorcycle trailer may be considered a “recreational” trailer by some, the cycleWagon® has the same backbone and rugged heritage as our commercial grade trailers. You can tell by our advanced design, top-notch components, and detailed “fit & finish” that we’re serious about our position as the industry leader. This focus on quality means you’ll run out of adventures long before your cycleWagon® is ready to call it quits.

- Fiberglass End Caps
- Radius Roof with Extruded Anodized Aluminum Cove
- Standard SmartFrame Design (*higher platform height*)
- Spring-Assisted Recessed Rear Ramp Door
- Rear Cornerpost Stabilizer Jacks
- Side Door with Flush Lock
- Flow-Thru Sidewall Vents
- Anodized Aluminum Bottom Panels
- ATP Stone Guard
- ATP Fenders
- Removable Chrome Wheel Chock(s)
- Floor Mounted D-Ring Tie-Downs
- Wall Mounted Tie-Offs
- 12 Volt Dome Light
- Wall Switch
- .030 Prefinished Aluminum Exterior Skin (11 colors)
- Jack Ram Hoist with Sand Pad
- Corrosion Preventative Compound (CPC) Undercoating on Chassis
- Safety Chains to D.O.T. Requirements

More Standard Features

Quality Construction - Always One Step Ahead



LED Stop/Tail/Turn

Designed exclusively for Wells Cargo. LED lights are proven to be brighter, more durable requiring less maintenance, and consume 90% less power reducing the load on the tow vehicle's electrical system as compared to traditional incandescent or bulb style lights.



Wet Cell Battery

Essential part of breakaway system. Applies trailer's full braking capacity for a minimum of 15 minutes meeting D.O.T. requirements. Low voltage indicator light. Up to 100

recharges.



Ramp Doors & Corner Post Jacks

Full width hinge with free floating 3/4" steel pin. Stronger than strap hinges. Won't bind. Welded perimeter door frame with gussets at major stress points. Full length



12 Volt Electrical System

All circuitry distributed from an easily accessible interior junction box. Primary connections made with wire nuts. No

reinforcements prevent bowing. Spring assist cable(s) for safety. Rear corner post stabilizer jacks with steel tube post are coated in Zincdychromate for rust resistance. *(Ramp door standard on certain models only.)*



Side Doors (Aluminum Hinges)

All door openings are welded with formed steel channel headers and gusseted for rigid anchoring. Exclusive vacuum laminating process

unitizes door components forming a super strong, lightweight door. The polystyrene core provides full insulation while the extruded aluminum trim adds extra rigidity. Resists bowing and warping.

hidden splices. All wiring is SAE truck/trailer color coded wire. One central location for all troubleshooting.



Anodized Roof Cove

Extruded aluminum Roof Cove (with drip rail) provides extra body support and solid anchoring for

roof and prefinished aluminum skin. Special anodizing process assures cove will maintain its "like-new" luster for years with minimal maintenance.



All Aluminum Anti-Rack Cam Lock

Commercial quality cast aluminum Cam Lock and stainless steel hasp deliver a long lasting, no-rust finish for the life of your trailer.

Anti-Rack design (forked Cam with "T" shaped Keeper) forms a structural link between door header and footer reducing door movement, frame torque, and road vibration. Better seal compression to prevent moisture penetration.



Bottom Trim

Extruded aluminum Bottom Trim provides extra body support and solid anchoring for prefinished aluminum skin.


Special anodizing process assures trim will maintain its "like-new" luster for years with minimal maintenance.



Corrosion Preventive Measures

To ward off the damaging effects of rust a Wells Cargo chassis is protected with a laboratory tested, automotive style undercoating. All exposed steel is painted with a state-of-the-art process including both a primer & urethane

topcoat for a smooth, long lasting finish. Also, a special corrosion resistant tape is applied between the steel frame and exterior aluminum skin to prevent electrolysis.

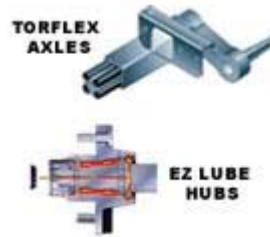

Torflex® Rubber Ride Axles with E-Z Lube Hubs

Equipped with Torflex® rubber torsion suspension system with progressive torque action and independent

wheel movement for maximum shock absorption and road stability. E-Z Lube hubs with outside grease fittings for bearing lubrication without disassembly. E-Coated wheels and brand name tires.

Plus:

- Fiberglass End Caps
- Exterior Grade Plywood Floor (undercoated)
- .030 Aluminum Exterior Skin
- Exclusive Non-Corrosive Screw Fasteners
- Recessed/Lighted License Plate Holder
- Aluminum Roof (4', 5', 6' & 7' wide models)
- Galvanized Steel Roof (8' wide models)
- Jack Ramp Hoist with Sand Pad
- 12 Volt Trailer End Connector



Fenders

Durable Aluminum Tread Plate fenders on single axle models.

Tandem axle models feature powder-coated, galvanealed steel fenderettes. Both styles provide attractive, long lasting rust resistant finishes. Easy to replace in the event

Motorcycle SE Series Specifications

MODEL	MODEL MC101-5 SE	MODEL MC101-7 SE	MODEL MC121-6 SE	MODEL MC122-7 SE	MODEL MC122-8 SE	MODEL MC142-7 SE	MODEL MC142-8 SE	MODEL MC162-7 SE	MODEL MC162-8 SE	MODEL MC182-7 SE	MODEL MC182-8 SE	MODEL MC202-7 SE	MODEL MC202-8 SE
NUMBER OF MOTORCYCLES	1	2	1	2	2	2	2	2	2	2	2	2	2
LOW PROFILE FRAME	No	No	No	No	No	No	No	No	No	No	No	No	No
BODY WIDTH	5'0"	7'0"	6'0"	7'0"	7'9"	7'0"	7'9"	7'0"	7'9"	7'0"	7'9"	7'0"	7'9"
BODY LENGTH	10'0"	10'0"	12'0"	12'0"	12'0"	14'0"	14'0"	16'0"	16'0"	18'0"	18'0"	20'0"	20'0"
OVERALL LENGTH	13'6"	14'0"	16'0"	16'0"	16'0"	18'0"	18'0"	20'0"	20'0"	22'0"	22'0"	24'0"	24'0"
OVERALL WIDTH	6'10"	8'6"	7'10"	8'6"	8'6"	8'6"	8'6"	8'6"	8'6"	8'6"	8'6"	8'6"	8'6"
OVERALL HEIGHT	6'11"	6'11 3/4"	6'11"	6'11 3/4"	6'11 3/4"	7'10"	7'10"	7'10"	7'10"	7'10"	7'10"	7'10"	7'10"
INTERIOR LENGTH	9'9"	9'9"	11'9"	11'9"	11'9"	13'9"	13'9"	15'9"	15'9"	17'9"	17'9"	19'9"	19'9"
INTERIOR WIDTH	4'9"	6'9"	5'9"	6'9"	7'6"	6'9"	7'6"	6'9"	7'6"	6'9"	7'6"	6'9"	7'6"
INTERIOR HEIGHT	5'6"	5'6"	5'6"	5'6"	5'6"	6'0"	6'0"	6'0"	6'0"	6'0"	6'0"	6'0"	6'0"
PLATFORM HEIGHT	16"	17"	16"	17"	17"	19"	19"	19"	19"	19"	19"	19"	19"
AXLES	Single	Single	Single	Tandem	Tandem	Tandem	Tandem	Tandem	Tandem	Tandem	Tandem	Tandem	Tandem
AXLE TYPE	6" Drop	6" Drop	6" Drop	6" Drop	6" Drop	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop
SUSPENSION	Torflex	Torflex	Torflex	Torflex	Torflex	Torflex	Torflex	Torflex	Torflex	Torflex	Torflex	Torflex	Torflex
TIRE SIZE	15"	15"	15"	15"	15"	15"	15"	15"	15"	15"	15"	15"	15"
LOAD RANGE	C	C	C	C	C	C	C	C	C	C	C	C	C
WHEEL BOLT PATTERN	5-Bolt/4.5	5-Bolt/4.5	5-Bolt/4.5	5-Bolt/4.5	5-Bolt/4.5	5-Bolt/4.5	5-Bolt/4.5	5-Bolt/4.5	5-Bolt/4.5	5-Bolt/4.5	5-Bolt/4.5	5-Bolt/4.5	5-Bolt/4.5
HITCH BALL SIZE	2"	2"	2"	2 5/16"	2 5/16"	2 5/16"	2 5/16"	2 5/16"	2 5/16"	2 5/16"	2 5/16"	2 5/16"	2 5/16"
HITCH TO TOP OF BALL	18"	19"	18"	19"	19"	18"	18"	18"	18"	18"	18"	18"	18"
HITCH WEIGHT (% OF CURB WEIGHT)	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%	10-15%
CURB WEIGHT(LB.)	995	1500	1420	2110	2220	2330	2440	2510	2620	2650	2760	2750	2860
GVWR(LB.)	2200	3850	2990	5900	5900	7000	7000	7000	7000	7000	7000	7000	7000
AVG. PAYLOAD CAPACITY(LB.)	1205	2350	1570	3790	3680	4670	4560	4490	4380	4350	4240	4250	4140

REAR DOORS	Ramp	Ramp	Ramp	Ramp	Ramp	Ramp	Ramp	Ramp	Ramp	Ramp	Ramp	Ramp	Ramp
REAR DOORS OPENING WIDTH	52"	76"	64"	76"	85"	76"	85"	76"	85"	76"	85"	76"	85"
REAR DOORS OPENING HEIGHT	57"	57"	57"	57"	57"	63"	63"	63"	63"	63"	63"	63"	63"

Specifications subject to change.

Motorcycle SE Series Options

- Extra Height (*not available on all models*)
- AlumaSport Wheels
- Spare Tire Carrier
- Spare Tire/Wheel
- Spare Tire Cover
- Additional Chocks
- Additional Tie-Downs
- Ratchet Straps
- 2 Bay Helmet Rack with Clothes Hanger
- Tie-Down Holder
- Paper Towel Holder
- Flashlight Holder
- Bonded Skin (*Smooth Exterior Sidewalls*)

More Exterior Options






Side Doors



Light-Duty Stabilizer Jack

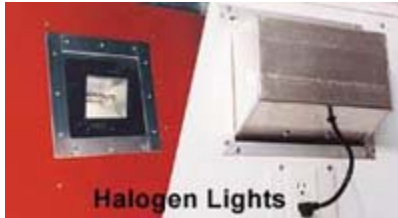

Halogen Lights



Awnings




Exterior Spare Tire Carrier



Radius Tinted Windows



Roll Up Doors

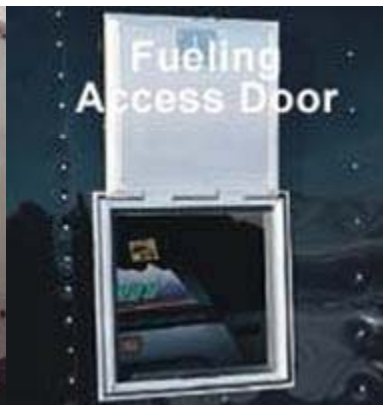

Fueling Access Door



AlumaSport Wheels



Nose Cone

Motorcycle SE Series Packages

Flash Package


- Radius Side Door
- AlumaSport Wheels
- Rear End Covered in Anodized Aluminum
- Bonded Skin (Smooth Exterior Sidewalls)
- White Vinyl Interior Sidewalls & Ceiling
- Insulated Ceiling
- LED Safety Package
- Side Graphics

Convenience Package

- Spare Tire Carrier
- Spare Tire/Wheel with Cover
- Helmet Rack
- Tie-Down Holder
- Paper Towel Holder
- Flashlight Holder

Signature Package

- Radius Side Door
- AlumaSport Wheels
- Rear End Covered in Anodized Aluminum
- .040 Aluminum Exterior Skin
- Bonded Skin (Smooth Exterior Sidewalls)
- White Vinyl Interior Sidewalls & Ceiling
- Insulated Ceiling
- Spare Tire Carrier
- Spare Tire/Wheel with Cover
- Helmet Rack
- Tie-Down Holder
- Paper Towel Holder
- Flashlight Holder
- LED Safety Package
- Side Graphics

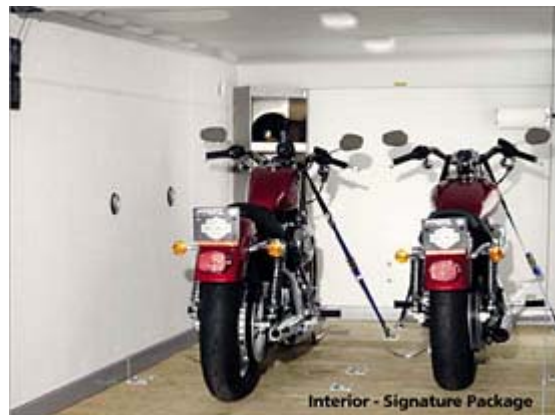

Interior - Signature Package

Skin Colors



Warranty

Duration of Warranty

Your Wells Cargo equipment, which has been manufactured, tested and inspected in accordance with carefully specified engineering requirements is warranted to the original owner to be free from defects in material and workmanship for the period of six (6) years, except as herein limited, from date of purchase. The obligation of this Warranty shall be limited to repairing or replacing any part or parts which, in the opinion of the Company, shall be proved defective in materials or workmanship under normal use and service during the six (6) year period commencing with the date of purchase. Jack rams, electrical wiring, glass, sealants, doors, seals, locks, paint, plumbing, couplers and jacks are warranted for a period of one (1) year from date of purchase.

This Warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

Limitations and Exclusions

This Warranty shall NOT extend to:

1. Wells Cargo equipment which has been modified, repaired, or altered in any way without the express written consent of Wells Cargo.
2. Unreasonable use (including failure to provide reasonable and necessary maintenance).
3. Tires, axles, axle assemblies, suspension components, ranges, heaters, refrigerators, air conditioners or all other appliances or components of the Wells Cargo equipment which are warranted separately by the respective manufacturers of said components. These warranties are contained in your owners packet.
4. Any consequential damages for breach of this or any other warranty expressed or implied whatsoever. Repair or replacement under this Warranty is the exclusive remedy of the customer. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.
5. Parts not supplied by Wells Cargo.
6. Certain parts which require replacement in the ordinary course of use to normal wear.

Procedure

To secure repair of a Wells Cargo trailer or any warranted parts under this Warranty, the unit or warranted part must be delivered, charges prepaid, to the nearest Wells Cargo manufacturing facility or as directed by Wells Cargo.

Your Wells Cargo dealer from whom you purchased your unit is responsible for the registration of your warranty with the factory. We ask that you cooperate with your dealer in supplying the necessary information completing the warranty card so that we may better serve you.

