

12LX-12


TANDEM AXLE LOW PROFILE EXTRA WIDE DUMP

| | | | |
|----------------------------|---|----------------------|--|
| G.V.W.R. | 12,000# | AXLES | Two 6000# Cambered Axles w/ Elec. Brakes |
| G.A.W.R. (EA. AXLE) | 6,000# | SUSPENSION | Multi-Leaf Slipper Spring w/ Equalizer |
| COUPLER | Adjustable 2-5/16" Bulldog | TIRE | LT235/85-16 Load Range E |
| SAFETY CHAINS | 1/4" Grd. 70 w/ Safety Latch Hook (2 ea.) | WHEEL | 16 X 6 White Spoke 8 Bolt |
| JACK | 7K Dropleg (Bolted On) | FLOOR | 12 Ga. Smooth Steel |
| TONGUE | 6" Channel Fold Back | LIGHTS | D.O.T. Stop, Tail, Turn and Clearance |
| FRAME | 6" Channel | ELEC. PLUG | 6 Way |
| CROSSMEMBERS | 4" - 13# I-Beam | FINISH (PREP) | Acid Etched w/White Phosphorus, Undercoated w/Panther 813 & Two Coats Primer |
| BED CROSSMEMBERS | 2" X 2" Square Tubing 14" oc. | FINISH | Painted w/ 2 Coats High Solid <i>Supreme</i> Acrylic Automotive Grade Enamel, and Pinstriped |
| BED LONG SILS | 4" Channel | | |
| BED SIDE RAILS | 3" X 6 1/2" Formed Angle | | |
| FENDERS | 14 Gauge Diamond Plate Double Broke Teardrop | | |

STANDARD FEATURES

- Complete Break-A-Way System w/ Charge Line
- 26" 12 Ga. Sides w/ Formed Channel Supports
- 12 Ga. Floor
- Lockable Control Unit
- Enclosed Pump & Battery Box Mounted In Front of Bed
- Protected Lighting
- Double Rear Gates w/ Cam Latch
- 1/2" Tie Rail On All 4 Sides
- 7' Slide in Ramps
- Self Contained Electric Hydraulic Scissor Lift
- 22 Stake Pockets (Sides & Front)
- 45 Degree Dump Angle
- Removable Header Across Rear

12LX-12

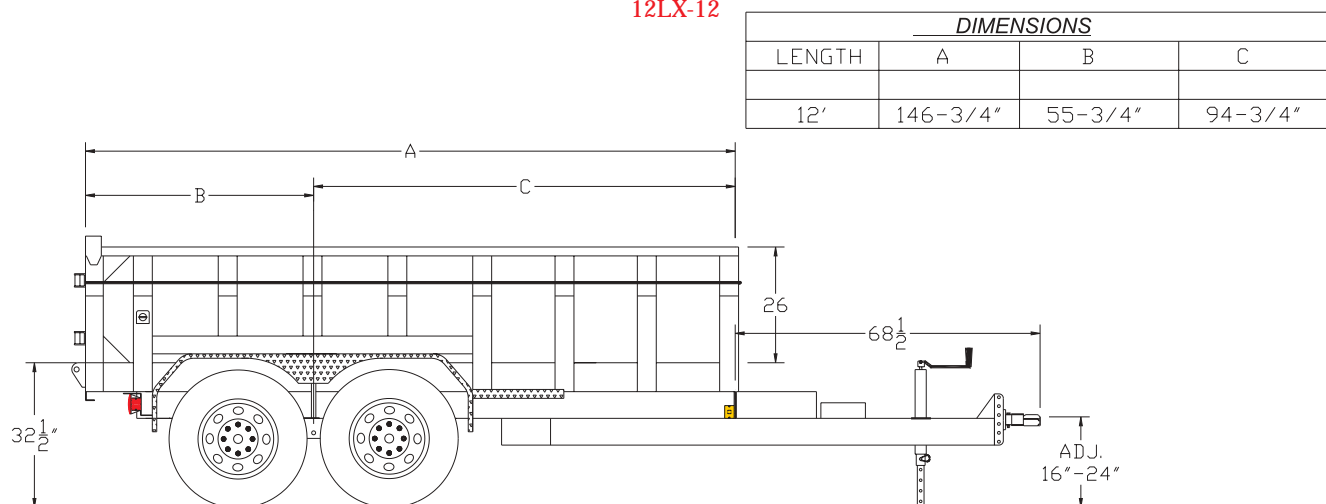

TRAILER WEIGHTS & CAPACITIES

| LENGTH | EMPTY WEIGHT | BOX CAPACITY |
|--------|--------------|--------------|
| 12' | 3,450# | 6.7 Yards |

OPTIONS

| | |
|-------------|--|
| HYD2 | Hydraulic Brakes on 2 Axles, 2-5/16" Adjustable Demco Actuator |
| HDLJ | Heavy Duty 10K Top Wind Drop Leg Jack |
| SP | 16" Spare Tire & Wheel - Load Range E |
| SPMT | Spare Tire Mount (on front of bed) |
| AP | Adjustable Pintle In Channel |

Effective January 1, 2003 (Specifications and Options subject to change without notice.)